



Amplifier Calibration Connection Diagram using LynxTwo Multi-channel Sound Card

Single-ended amp input
(Connector may be
different than RCA phono)



Amp Output
(Connector may be
different than Banana)

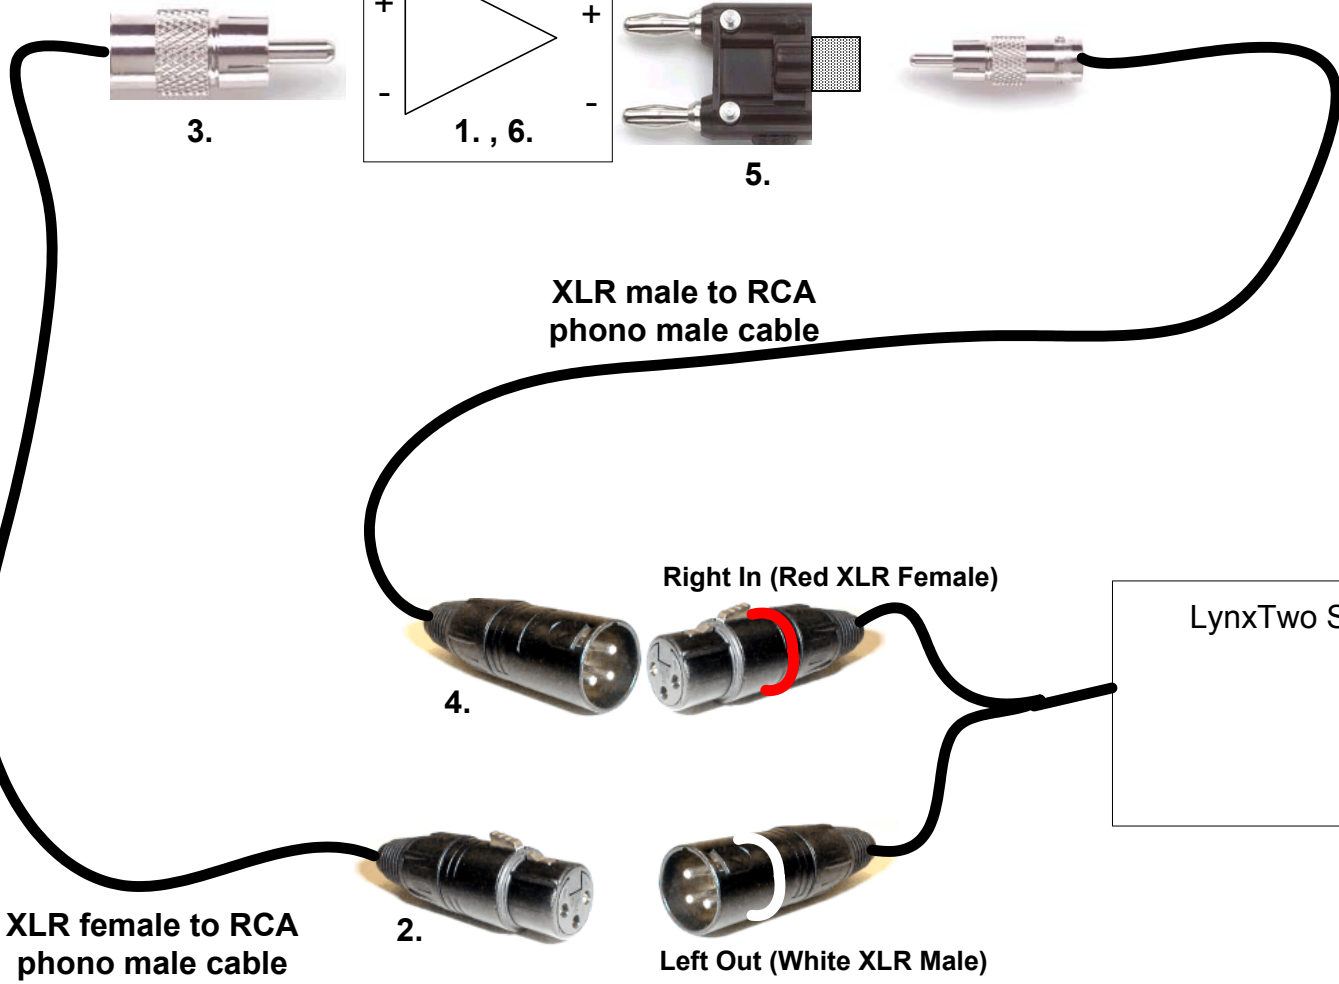

1. Make sure amplifier is **OFF**.
2. Plug XLR female into CH1 Out (White XLR Male).
3. Plug RCA phono (or other connector type appropriate for your amplifier) to amplifier input channel.
4. Plug XLR male into CH2 In (Red XLR Female).
5. Plug Banana-to-RCA female connector to amplifier output channel.
6. Turn amplifier **ON**.
7. Press "Calibrate" button in Calibration Editor to calibrate amplifier.
8. After calibration is successful, click Save As to save new amplifier gain settings to disk or close Calibration Editor and click File -> Save to save the entire sequence.