


Single-ended amp input
(Connector may be different than RCA phono)




Amp Output
(Connector may be different than Banana)




5.



3.

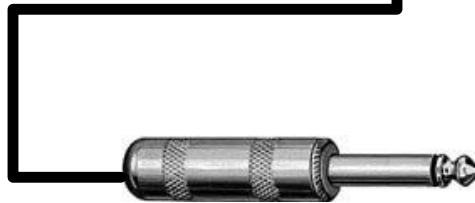

4.

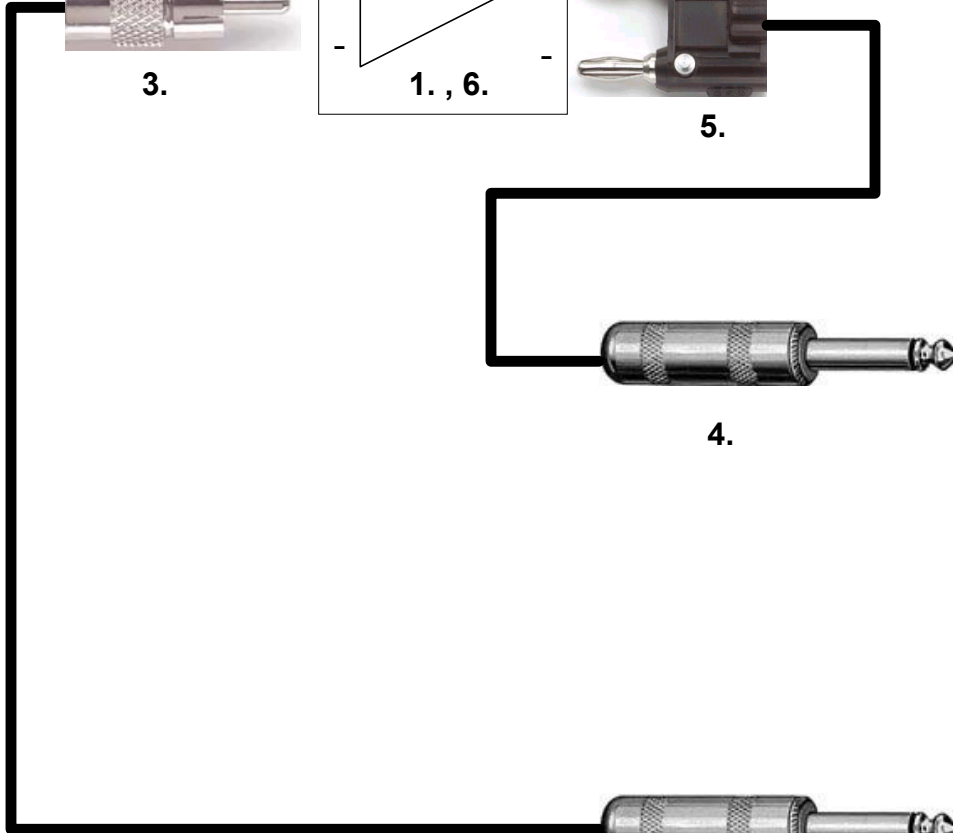

2.

DAL CardDeluxe Sound Card

Right Input

Left Input

Right Output

Left Output



1. Make sure amplifier is **OFF**.
 2. Insert 1/4-inch plug into Left Out of sound card.
 3. Insert RCA phono (or other connector type appropriate for your amplifier) to amplifier input channel.
 4. Insert 1/4-inch plug into Right In of sound card.
 5. Insert Banana connector (or other connector type appropriate for your amplifier) to amplifier output channel.
 6. Turn amplifier **ON**.
 7. Press "Calibrate" button in Calibration Editor to calibrate amplifier.
- (NOTE: Make sure Calibration Editor Input is set to Right, units are V/V, and dB reference is 1.00)
8. After calibration is successful, click Save As to save new amplifier gain settings to disk or close Calibration Editor and click File -> Save to save the entire sequence.